FAIRCHILD

SEMICONDUCTOR

CD4043BC • CD4044BC Quad 3-STATE NOR R/S Latches • **Quad 3-STATE NAND R/S Latches**

General Description

The CD4043BC are quad cross-couple 3-STATE CMOS NOR latches, and the CD4044BC are guad cross-couple 3-STATE CMOS NAND latches. Each latch has a separate Q output and individual SET and RESET inputs. There is a common 3-STATE ENABLE input for all four latches. A logic "1" on the ENABLE input connects the latch states to the Q outputs. A logic "0" on the ENABLE input disconnects the latch states from the Q outputs resulting in an open circuit condition on the Q output. The 3-STATE feature allows common bussing of the outputs.

Features

- Wide supply voltage range: 3V to 15V
- Low power: 100 nW (typ.)
- High noise immunity: 0.45 V_{DD} (typ.)
- Separate SET and RESET inputs for each latch
- NOR and NAND configuration
- 3-STATE output with common output enable

Applications

- · Multiple bus storage
- · Strobed register
- · Four bits of independent storage with output enable

LATCH

ENABLE

LATC 4


General digital logic

Ordering Code:

Order Number	Package Number	Package Description
CD4043BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Body
CD4043BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
CD4044BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Body
CD4044BCSJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
CD4044BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.


Connection Diagrams

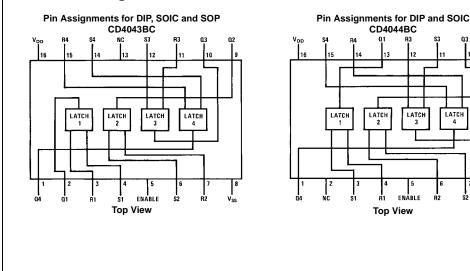


© 1999 Fairchild Semiconductor Corporation DS005967.prf www.fairchildsemi.com

October 1987 Revised January 1999

CD4043BC • CD4044BC





Truth Tables

CD4043BC						
S	R	E	Q			
Х	Х	0	OC NC			
0	0	1	NC			
1	0	1	1			
0	1	1	0			
1	1	1	Δ			



S	R	Е	Q
Х	Х	0	OC NC
1	1	1	NC
0	1	1	1
1	0	1	0
0	0	1	$\Delta\Delta$

 $\begin{array}{l} OC = 3\text{-}STATE\\ NC = No \ change\\ X = Don't \ care\\ \Delta = Dominated \ by \ S = 1 \ input\\ \Delta \Delta = Dominated \ by \ R = 0 \ input \end{array}$

Absolute Maximum Ratings(Note 1)

(Note 2)	
Supply Voltage (V _{DD})	-0.5V to +18V
Input Voltage (V _{IN})	–0.5V to V _{DD} +0.5V
Storage Temperature Range (T _S)	$-65^{\circ}C$ to $+150^{\circ}C$
Power Dissipation (P _D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (TL)	
(Soldering, 10 seconds)	260°C

Recommended Operating Conditions (Note 2)

Supply Voltage (V _{DD})	3.0V to 15V
Input Voltage (V _{IN})	0 to $V_{DD} V$
Operating Temperature Range (T _A)	
CD4043BC, CD4044BC	-40°C to +85°C

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and "Electrical Characteristics" provide conditions for actual device operation.


Note 2: $V_{SS} = 0V$ unless otherwise specified.


	Parameter	Conditions	_40°C		+25°C			+85°C		
Symbol			Min	Max	Min	Typ	Мах	Min	Max	Units
IDD	Quiescent	$V_{DD} = 5V, V_{IN} = V_{DD} \text{ or } V_{SS}$		20		0.01	20		150	μA
00	Device Current	$V_{DD} = 10V, V_{IN} = V_{DD} \text{ or } V_{SS}$		40		0.01	40		300	μΑ
		$V_{DD} = 15V$, $V_{IN} = V_{DD}$ or V_{SS}		80		0.02	80		600	μA
V _{OL}	LOW Level	$ I_0 \le 1 \ \mu A, \ V_{IL} = 0V, \ V_{IH} = V_{DD}$								· ·
02	Output Voltage	$V_{DD} = 5.0V$		0.05		0	0.05		0.05	V
		$V_{DD} = 10V$		0.05		0	0.05		0.05	V
		V _{DD} = 15V		0.05		0	0.05		0.05	V
V _{OH}	HIGH Level	$ I_0 \le 1 \ \mu A, \ V_{IL} = 0V, \ V_{IH} = V_{DD}$								
	Output Voltage	$V_{DD} = 5.0V$	4.95		4.95	5.0		4.95		V
		$V_{DD} = 10V$	9.95		9.95	10		9.95		V
		$V_{DD} = 15V$	14.95		14.95	15		14.95		V
VIL	LOW Level	I _O ≤ 1 μA								
	Input Voltage	$V_{DD} = 5.0V, V_{O} = 0.5V \text{ or } 4.5V$		1.5		2.25	1.5		1.5	V
		$V_{DD} = 10V, V_{O} = 1.0V \text{ or } 9.0V$		3.0		4.5	3.0		3.0	V
		$V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$		4.0		6.75	4.0		4.0	V
VIH	HIGH Level	I _O ≤ 1 μA								
	Input Voltage	V_{DD} = 5.0V, V_{O} = 0.5V or 4.5V	3.5		3.5			3.5		V
		$V_{DD} = 5.0V, V_{O} = 1.0V \text{ or } 9.0V$	7.0		7.0			7.0		V
		$V_{DD} = 15V, V_{O} = 1.5V \text{ or } 13.5V$	11		11			11		V
I _{OL}	LOW Level	$V_{IL} = 0V, V_{IH} = V_{DD}$								
	Output Current	$V_{DD} = 5.0V, V_{O} = 0.4V$	0.52		0.44	0.88		0.36		mA
	(Note 3)	$V_{DD} = 10V, V_{O} = 0.5V$	1.3		1.1	2.2		0.9		mA
		$V_{DD} = 15V, V_{O} = 1.5V$	3.6		3.0	6.0		2.4		mA
I _{OH}	HIGH Level	$V_{IL} = 0V, V_{IH} = V_{DD}$								
	Output Current	$V_{DD} = 5.0V, V_{O} = 4.6V$	-0.52		-0.44	-0.32		-0.36		mA
	(Note 3)	$V_{DD} = 10V, V_{O} = 9.5V$	-1.3		-1.1	-0.8		-0.9		mA
		$V_{DD} = 15V, V_{O} = 13.5V$	-3.6		-3.0	-2.4		-2.4		mA
I _{IN}	Input Current	$V_{DD} = 15V, V_{IN} = 0V$	-0.3			-0.3			-1.0	μΑ
		$V_{DD} = 15V, V_{IN} = 15V$	0.3			0.3			1.0	μA

DC Electrical Characteristics (Note 2)

Note 3: I_{OH} and I_{OL} are tested one output at a time.


www.fairchildsemi.com

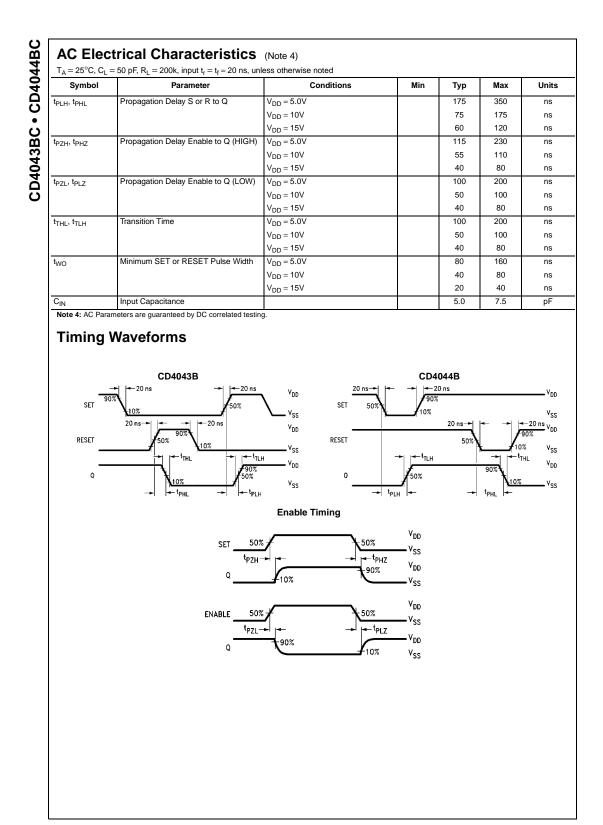

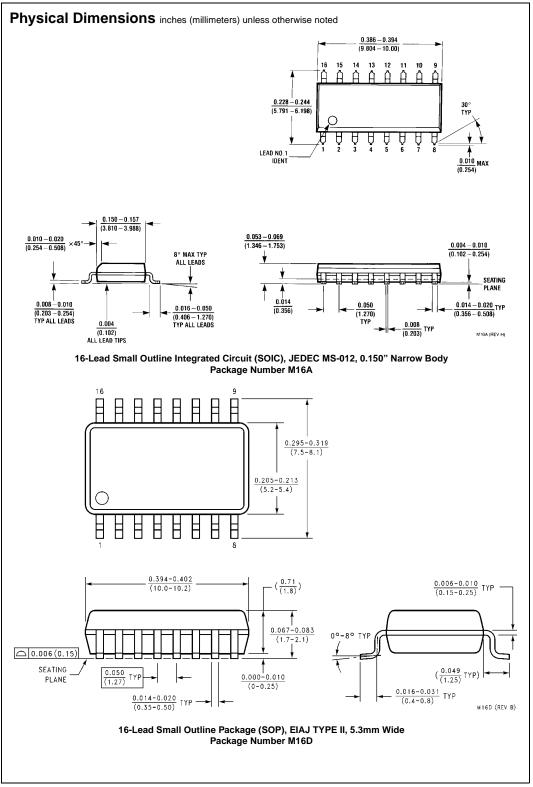

CD4043BC • CD4044BC

www.fairchildsemi.com

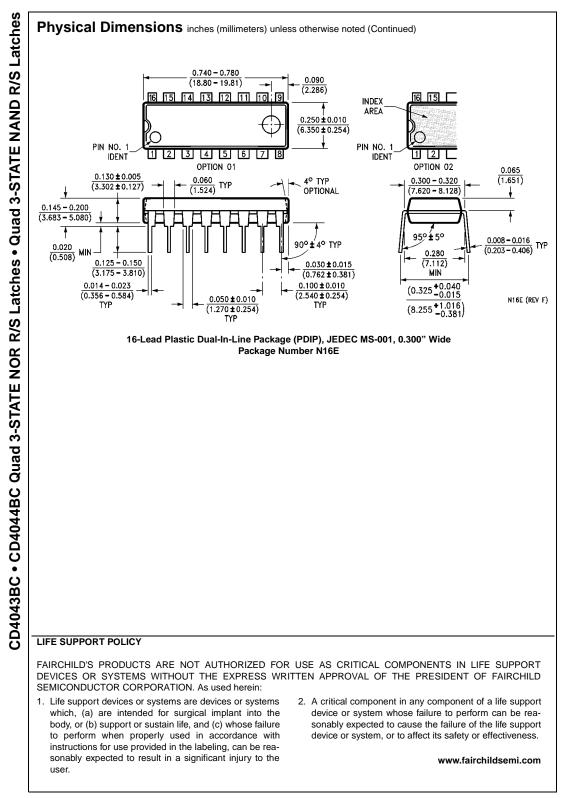

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.